


BJ-5M-96-4P

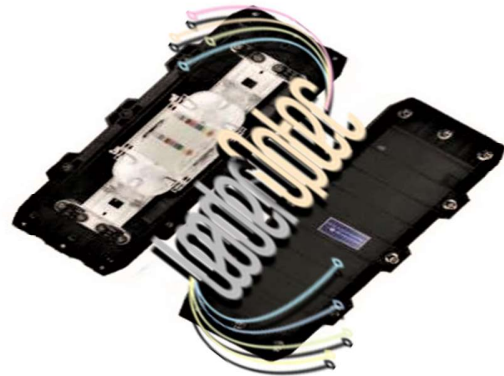

Fibre Optic Splice Closure BJ-5M-96-4P

Features

May be used for cut, uncut and taut sheath applications.

May be used for all fiber optic cable.

Sheath retention & central strength member termination system included.

Ribbed closure construction-lightweight plastic offers strength and resistance to chemical and U.V attack

Installation and re-entry with a minimum of tools

Re-entable and reusable

All hardware is captive

Protection class: IP68

ROHS compliance

Application Duct Mounting

Aerial Mounting, Wall Mounting

Specifications

Model No	Size(mm) L XW XH	Spliced fibre storage capacity	Cable ports	Max.diameter of cable(mm)	Splice Trays
BJ-5M-96-4P	432mmx186mmx 100mm	Standard fibre, 96 splices (4x24 splices)	4 ports	4 ports: each port for 1 cable with max dia 22 mm	Max.4 trays(24 splices),each tray up to 24 splices

Unit 27 Fischer Park, 9 Blessing Ninela Rd, Hillcrest, Kwa-Zulu Natal, 3610

Company Reg: 2010/176961/23 (LeaderOptec)